

RED DOT SIGHT



RED DOT SIGHT

PRODUCT MANUAL

SYM SERIES




PLEASE READ THE ENTIRE MANUAL

FAILURE TO FOLLOW THESE INSTRUCTIONS AND PROCEDURES MAY RESULT IN INJURY OR DEATH.

Always follow firearm safety rules as outlined by the firearms manufacturer. Keep this and all firearm related products locked and secured from children or other unauthorized users.


CONTENTS

SYM Series	3
Product Parameters	4
Features And Specifications	5
Product Installation And Mounting	6
Windage And Elevation Adjustments	7
Windage And Elevation Adjustment Turrets	8
Battery Warnings	9

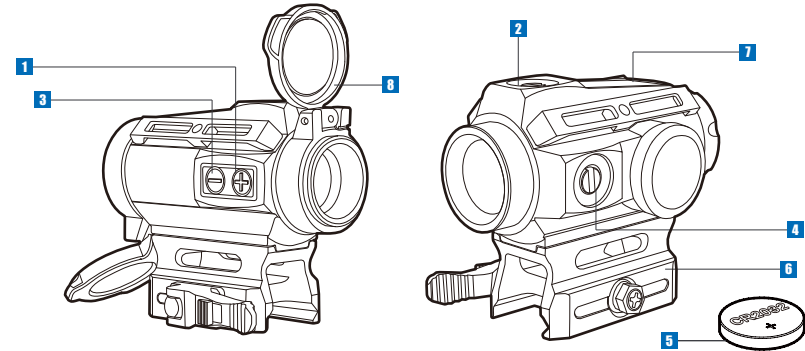

**SYM
SERIES**

- **1** POWER ON, BRIGHTNESS (+)
- **3** POWER ON, BRIGHTNESS (-)
- **5** CR2032 BATTERY
- **7** SOLAR PANEL
- **2** ELEVATION ADJUSTER
- **4** WINDAGE ADJUSTER
- **6** QUICK-DETACH MOUNT
- **8** ELASTIC COVER



PRODUCT PARAMETERS


Magnification	Window Lens Size	Windage Adjustment Range
1x	20mm	±30moa
Elevation Adjustment Range	Turret Adjustment Type	Spot Color
±30moa	Tool	Red
Illuminated Reticle Levels	Battery Type	Tube Material
7	CR2032	Aluminum
Shock Proof	Rain Proof	Fog Proof
Yes	Yes	Yes
Color	Length	Sight Weight
BK/TAN/GY	96mm	206g

FEATURES AND SPECIFICATIONS

- **Brightness:** The SYM Series features 7 adjustable brightness levels, allowing seamless transitions between day and night for consistently clear visibility.
- **Aiming Dot:** The SYM Series features two reticle options: a 2.0 MOA round dot and a crosshair with an outer circle. Simply press and hold the  button to switch between them.
- **Battery:** The SYM SERIES is powered by a single **CR2032** battery. This battery will provide most users with years of maintenance free service. Depending on reticle intensity, ambient conditions and use, battery life may vary.
- **Quick-detach Mount:** Equipped with a quick-detach mount compatible with Picatinny rails, making setup effortless. Enjoy smooth operation with easy installation and removal.
- **Solar Power:** When outdoors and exposed to sufficient sunlight, the solar panel activates to power the sight, allowing the reticle to light up even without a battery installed.

PRODUCT INSTALLATION AND MOUNTING

The SYM SERIES is intended for use on handgun slides that possess provisions for miniature optics. This interface is common among many manufacturers. It is recommended that an experienced gun smith verify this product's fit prior to making any permanent modification to your firearm. Use the following guide to insure the best fit.

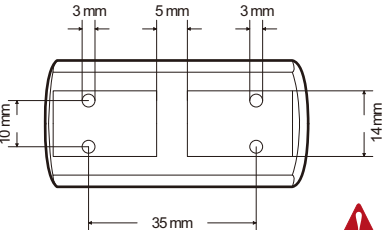

WARNING: CONFIRM THAT YOUR SIGHT IS SECURELY AND PROPERLY INSTALLED. AN IMPROPERLY INSTALLED SIGHT COULD BECOME DETACHED DURING RECOIL CAUSING INJURY

WINDAGE AND ELEVATION ADJUSTMENTS

The SYM SERIES is fully adjustable for both windage and elevation. The adjustment screws are located on the top and right side of the sight body.


Make the necessary adjustments per the table below. Typically one turn is sufficient.

ELEVATION ADJUSTMENT		WINDAGE ADJUSTMENT	
UP*	CLOCKWISE 	LEFT*	COUNTER CLOCKWISE 
DOWN*	COUNTER CLOCKWISE 	RIGHT*	CLOCKWISE 

*POINT OF IMPACT

*POINT OF IMPACT

• **NOTE:** Adjustments to both the windage and elevation knobs, reference your Point of Impact (POI). Should your impacts be below your point of aim, dial UP to reach zero.

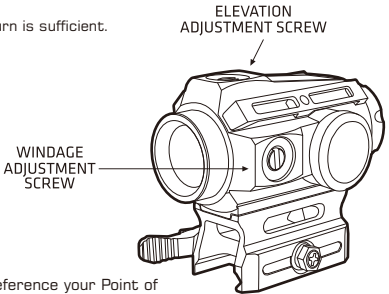

BATTERY WARNINGS



WARNING: IF A BATTERY OPERATED ACCESSORY OR ATTACHMENT (I.E. LASER, OPTICAL SIGHT OR FLASH LIGHT, ETC.) IS SUPPLIED OR USED WITH THIS FIREARM, THE FOLLOWING WARNINGS AND INSTRUCTIONS MUST BE ADHERED TO.



WARNING: KEEP BATTERIES AWAY FROM CHILDREN. THERE IS A CHEMICAL BURN HAZARD ASSOCIATED WITH BATTERIES.



WARNING: IF A NEW OR USED LITHIUM BUTTON/COIN CELL BATTERY IS SWALLOWED OR ENTERS THE BODY, IT CAN CAUSE SEVERE INTERNAL BURNS AND CAN LEAD TO DEATH IN AS LITTLE AS 2 HOURS. ALWAYS COMPLETELY SECURE THE BATTERY COMPARTMENT. IF THE BATTERY COMPARTMENT DOES NOT CLOSE SECURELY, STOP USING THE PRODUCT, REMOVE THE BATTERIES, AND KEEP IT AWAY FROM CHILDREN. IF YOU THINK BATTERIES MIGHT HAVE BEEN SWALLOWED OR PLACED INSIDE ANY PART OF THE BODY, SEEK IMMEDIATE MEDICAL ATTENTION.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and;

(2) This device must accept any interference received, including interference that may cause undesired operation.

- When used correctly, batteries provide a safe and dependable source of portable power. However, misuse or abuse may result in leakage, fire, or explosion.
- Batteries can explode or leak and cause burns if installed backwards, disassembled, charged, or exposed to water, fire or high temperature.
- Always take care to install your batteries correctly observing the “+” and “-” marks on the battery and the device.
- Always replace the whole set of batteries at one time, taking care not to mix old and new batteries, or batteries of different types.
- Store unused batteries in their original packaging and away from metal objects that may short-circuit them.
- Remove discharged batteries from equipment promptly to avoid possible damage from leakage.
- Never dispose of batteries in fire. (Failure to observe this precaution may result in an explosion.)
- The batteries should be disposed of properly, including keeping them away from children.
- Dispose of used batteries immediately. Even used batteries can cause injury.